

DATASHEET




CC 920

Coaxial circulator

Internal order code

Template Code:

4B42

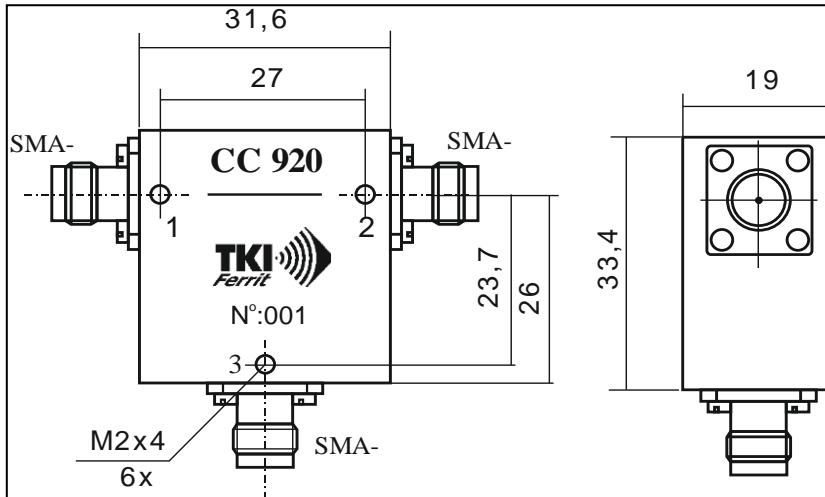

Parameters

Name	Min	Max	Dim	Criteria
Frequency band	880,0	960,0	MHz	
Insertion loss		0,3	dB	
Isolation	23		dB	
VSWR		1,15		
Power handling		100	W	
Temperature range	-10	70	°C	
Surface temperature		75	°C	
Connector	SMA			
Direction	1	→	2	
Body material	Ni coated			
Standards	ISO 9001		RoHS	

NOTE: The parameters on the DATASHEET are guaranteed by the manufacturer as measured values on every unit, EXCEPT the values in grey spaces which are estimated values deduced from the material nature, recent experience, investigations or theoretical considerations. Further measurements are to be ordered particularly.

Date	Producer's Sign	Customer's confirmation
10/08/2016		

Roote IC 1327K

The customer is kindly asked to confirm the parameters, send the signed DATASHEET with the order. The order goes to force including this confirmed datasheet.

