




IW 19.5

WR 42 Waveguide Isolator

Template Code:

4B42

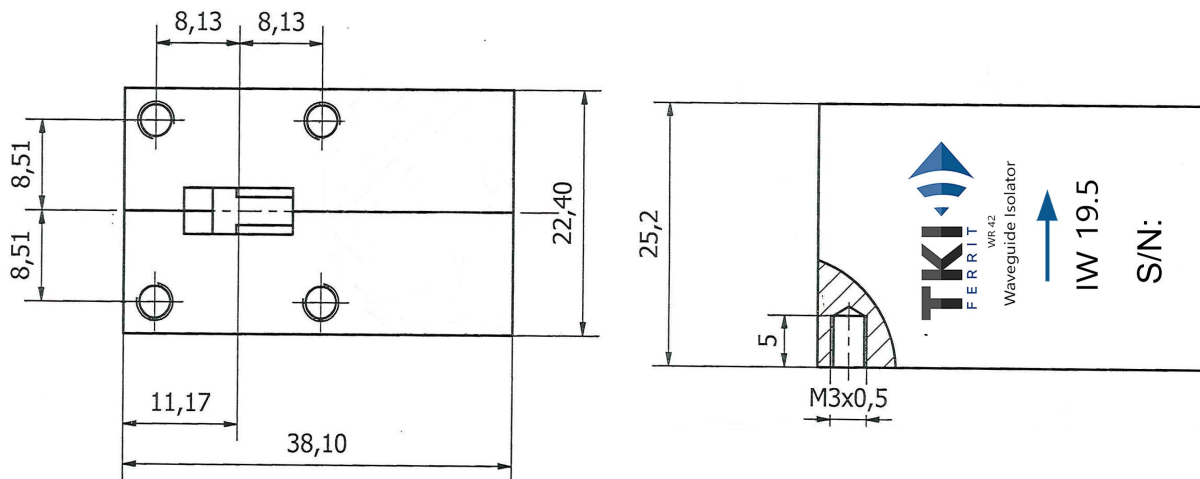

Parameters

Name	Min	Max	Dim	Criteria
Frequency band	17,7	21,2	GHz	
Insertion loss		0,3	dB	0 to + 60 °C
Isolation	20		dB	0 to + 60 °C
VSWR		1,25:1		0 to + 60 °C
Forward power		2	W	
Reverse power		1	W	
Operating temperature	0	60	°C	
Interface	WR42 (EIA)			

Producer's sign.	Date	Customer's confirmation	Date
E.Lakatos	2018.05.14		

TKI_Ferrit Development and Manufacturing Ltd. 1142Budapest, Ungvar utca 64-66. Hungary
Phone: +36 1 422 0029